


SPEE-D® CHANNEL DRAINS

PROFILE CHANNEL DRAINS *Patented*



- Ideal for commercial as well as residential applications.
- Effective in everything from patios to light vehicular traffic areas.

	Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
	240	2 ft. Channel Grate	White	24ft	1.42	25PF	NDS #240, #241, #242, #243, #244, #251, 2 ft. Structural Foam Polyolefin Secured Channel Grate with UV inhibitor. Open surface area 19.30 square inches per foot. 25.28 GPM per foot.
	241		Gray	24ft	1.42	25PF	
	242		Green	24ft	1.42	25PF	
	243		Black	24ft	1.42	25PF	
	244		Sand	24ft	1.42	25PF	
	251		Brick Red	24ft	1.42	25PF	
		Requires 4 screws per grate ADA Compliant					

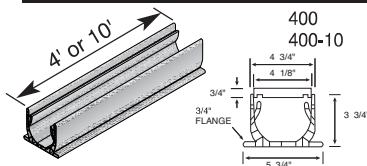

Grate should be recessed 1/8" below finish grade in non-traffic applications and 1/4" below finish grade in traffic applications.

SPEE-D® ACCESSORIES

	Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class
	229	Stainless Steel Screws, FH #8 x 1",	Steel	48	0.06	25PF
	230	6" Channel Installation Stake	Gray	24	0.04	25PF
	234	2' long fabricated 3" & 4" Spigot Bottom Outlet with Strainer. Fits 3" or 4" Sewer and Drain Fittings. Grates not included.	Gray	12	2.67	25PF
	245	Channel Strainer Coupling	Gray	20	0.35	25PF
	246	2" Schedule 40 SPT End Outlet	Gray	10	0.40	25PF
	247	Channel End Cap	Gray	10	0.40	25PF
	248	Channel Coupling	Gray	20	0.40	25PF
	249	3" & 4" Offset End Outlet (connects to 3" S&D Pipe, 4" S&D Fittings)	Gray	10	0.50	25PF
	2301	Fabricated 45° Elbow with grate	Gray	1	2.00	25PF
	2302		Green	1	2.00	25PF
	2361	Fabricated Cross and Grate	Gray	1	3.00	25PF
	2370	Fabricated Tee with Grate	White	1	3.00	25PF
	2371		Gray	1	3.00	25PF
	2372		Green	1	3.00	25PF
	2381	Fabricated 90° Elbow with grate	Gray	1	3.00	25PF

Note: All dimensions are nominal. All weights are for shipping purposes only. Availability is subject to change.